


YMSUS Xpress

Swerv USB Hub, Single

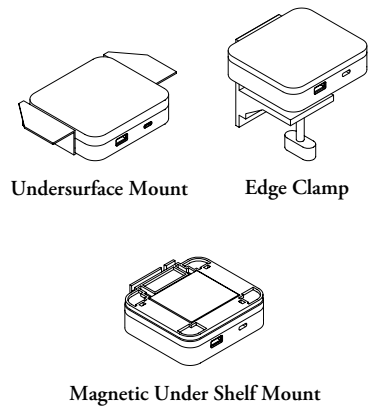

What's Included

Swerv USB Hub, Single hub with 1 USB-A port and 1 USB-C port, undersurface mount, edge clamp (if specified), AC adapter or DC power connection(no adapter), mounting hardware.

Notes

DC Power Connection is available for Standard Capacity only.

Each Swerv USB matches the shape and finishes of the Swerv Monitor Arm, Single top cap.

Standard Capacity Swerv USB HUB has 1 USB-A port and 1 USB-C port.

- USB-A Output: 5VDC (12 Watts maximum) USB-C Output: 5-12 VDC (18 Watt maximum).

High Capacity Swerv USB HUB has 1 USB-A port and 1 USB-C port.

- USB-A Output: 5VDC (12 Watts maximum) USB-C Output: 5-20 VDC (65 Watt maximum).

Power Supply: Input 110 VAC, Output 36 Watts for standard capacity and 80 Watts for high capacity.

DC power connection (D) cannot be used with high capacity.

Available with Edge Clamp,Undersurface Mount or Magnetic Under Shelf Mount.

Xpress Available through *Teknion's Xpress Program*.

PRODUCT OPTIONS

Power Capacity	Mount	Country of Installation	Finish	Plug Style
H High Capacity	M1 Undersurface Mount	A Canada/USA	25 Crisp Grey	D DC Power Connection
S Standard Capacity	M2 Edge Clamp		60 Platinum	S Standard with Power Adapter
	M3 Magnetic Under Shelf Mount		68 Anthracite	

SAMPLE ORDER CODE

YMSUS H	M2	A	68	D
----------------	-----------	----------	-----------	----------

MOUNT

Swerv USB Hub, Single, High Capacity, Undersurface Mount
Swerv USB Hub, Single, High Capacity, Edge Clamp
Swerv USB Hub, Single, High Capacity, Magnetic Under Shelf Mount
Swerv USB Hub, Single, Standard Capacity, Undersurface Mount
Swerv USB Hub, Single, Standard Capacity, Edge Clamp
Swerv USB Hub, Single, Standard Capacity, Magnetic Under Shelf Mount

PRICING

DC Power Connection	Standard with Power Adapter
n/a	500
n/a	549
n/a	582
154	215
209	270
248	310