

The Linear Power Module provides accessibility of outlets and communication plugs in both sides.

WHAT'S INCLUDED

1 linear power module, media holder plate and mounting hardware.

WHAT'S EXCLUDED

Faceplate (BLECF).

NOTES

Each USB Outlet has one USB-A port and one USB-C port for charging only.

The USB-A port always supplies 10 Watts maximum at 5 Volts DC when used alone.

The USB-C port supplies 18 Watts maximum at 5 to 12 Volts DC when used alone.

Maximum combined output is 15 Watts when both ports are used together: 5 Watts for USB-A port and 10 Watts for USB-C port.


The faceplates (BLECF) **are not** compatible with Linear Power Module – Compact 8" (C0220 or C0300).

Not all configurations apply to all worksurface types. Refer to the Application Guide for details.

The outlets are finished in Soft Gris.

Refer to local electrical code for guidance.

Not all configurations are available as Xpress, Please see Xpress catalogue and/or specification software for details.

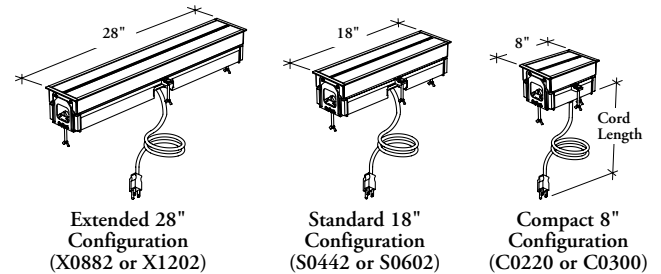

PRODUCT OPTIONS

Configuration	Wire System	Cord Length	Door and Case Finish	Frame Finish
C0220 Compact 8" – 2 Power/2 USB/0 Media	H Hard Wire Base Feed (Single Circuit)	072, 180	Foundation	Foundation
C0300 Compact 8" – 3 Power/0 USB/0 Media	P Plug-In (Shown)		Mica	Accent
S0442 Standard 18" – 4 Power/4 USB/2 Media				Mica
S0602 Standard 18" – 6 Power/0 USB/2 Media				
X0882 Extended 28" – 8 Power/8 USB/2 Media				
X1202 Extended 28" – 12 Power/0 USB/2 Media				

SAMPLE ORDER CODE

BLELP S0442	H	072	74	74
--------------------	----------	------------	-----------	-----------

DIMENSIONS

INCHES / MM

L
72 / 1829
180 / 4572

PRICING

PLUG-IN (P)

CONFIGURATION

C0220	C0300	S0442	S0602	X0882	X1202
534	422	815	594	1285	837
589	477	871	647	1338	894

Xpress

Xpress

Xpress

HARD WIRE BASE FEED (H)

S0442	S0602	X0882	X1202
984	760	1451	1004
n/a	n/a	n/a	n/a