


W W E P N
International Power Tray

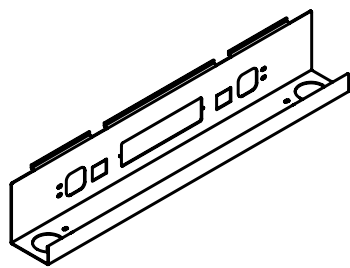

The International Power Tray mounts to the accessory beam below the frame to accept international electrics and for wire and cable management.

WHAT’S INCLUDED

1 nominally sized international power tray.

NOTES

Mounts to the center support beam below the frame to accept international electrics.

Tray is complete with holes which will allow for the mounting of Meyer and Byrne power bars.

Available in widths from 48" - 96" to align with worksurface widths, however sizes are nominal, the actual widths are 8" narrower than the nominal width.

Both electrical cables and data cables mount outside of the power tray, they are not shielded.

Sliding Worksurface (WWWS) **cannot** be used with Accommodation Kit (WWSKL).

PRODUCT OPTIONS

Style	Mounting Style	Worksurface Width (6" increments)	Finish
D For Double-Sided Bench (Shown)	P Byrne	48 - 96	Foundation
S For Single-Sided Bench	M Meyer		Mica
W For 120° Bench	C For CALA Byrne 2 Outlet		Accent
	D For CALA Byrne 4 Outlet		

SAMPLE ORDER CODE

W W E P N D	P	72	74
--------------------	----------	-----------	-----------

DIMENSIONS
INCHES / MM

Worksurface Width
48 / 1219
54 / 1372
60 / 1524
66 / 1676
72 / 1829
78 / 1981
84 / 2134
90 / 2286
96 / 2438

PRICING

ALL MOUNTING STYLES	
Foundation	Mica/Accent
122	124
133	140
151	156
164	171
180	184
193	204
193	204
193	204
193	204