

The Linear Power Module provides accessibility of outlets and communication plugs in both sides.

WHAT'S INCLUDED

1 linear power module, media holder plate and mounting hardware.

WHAT'S EXCLUDED

Faceplate (BLECF).

NOTES

Each USB Outlet has one USB-A port and one USB-C port for charging only.

The USB-A port always supplies 10 Watts maximum at 5 Volts DC when used alone.

The USB-C port supplies 18 Watts maximum at 5 to 12 Volts DC when used alone.

Maximum combined output is 15 Watts when both ports are used together: 5 Watts for USB-A port and 10 Watts for USB-C port.

The faceplates (BLECF) are **not** compatible with Linear Power Module – Compact 8" (C0220 or C0300).


Not all configurations apply to all worksurface types. Refer to the Application Guide for details.

The outlets are finished in Soft Gris.

Refer to local electrical code for guidance.

Not all configurations are available as Xpress, Please see Xpress catalogue and/or specification software for details.

BLELP
Linear Power Module

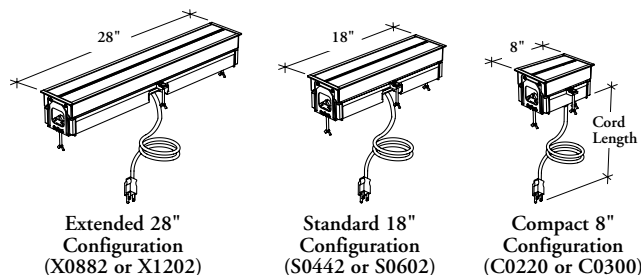

PRODUCT OPTIONS

Configuration	Wire System	Cord Length	Door and Case Finish	Frame Finish
C0220 Compact 8" – 2 Power/2 USB/0 Media	H Hard Wire Base Feed (Single Circuit)	072, 180	Foundation Mica	Foundation
C0300 Compact 8" – 3 Power/0 USB/0 Media	P Plug-In (Shown)			Accent Mica
S0442 Standard 18" – 4 Power/4 USB/2 Media				
S0602 Standard 18" – 6 Power/0 USB/2 Media				
X0882 Extended 28" – 8 Power/8 USB/2 Media				
X1202 Extended 28" – 12 Power/0 USB/2 Media				

SAMPLE ORDER CODE

BLELP S0442	H	072	Q	Q
--------------------	----------	------------	----------	----------

DIMENSIONS
INCHES / MM

L
72 / 1829
180 / 4572

PRICING

PLUG-IN (P)						HARD WIRE BASE FEED (H)			
CONFIGURATION									
C0220	C0300	S0442	S0602	X0882	X1202	S0442	S0602	X0882	X1202
514	406	784	572	1237	806	947	731	1397	966
567	459	838	623	1288	860	n/a	n/a	n/a	n/a

Xpress

Xpress

Xpress