


Xpress

BLYTU

Tangent Undercabinet Light

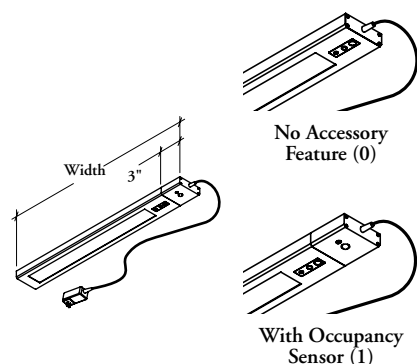

This light is mounted to the underside of hutches, standard or cubic overhead cabinets or standard wall cabinets. It provides task lighting for the worksurface.

WHAT'S INCLUDED

1 tangent undercabinet light of specified width, attachment hardware for both metal and wood overhead cabinets (magnets, mounting plates and screws), and 10' cord with detachable power adapter face.

NOTES

Color temperature of 3500K.

Dimming of ON/OFF, 100%, 60%, 30%.

Lifespan of 50,000 hours.

Color Rendering Index (CRI) of 80+.

Generates 900 Lux.

UL/c-UL certified.

Optional PIR Occupancy Sensor with override for on and off.

Input voltage 100 - 240 V.

Output voltage 24 V 1A.

20" wide light can be used with 24" to 84" wide overheads.

23" wide light can be used with 30" to 84" wide overheads.

30" and 33" wide lights can be used with 42" to 84" wide overheads.

40" wide light can be used with overhead 48" to 84" wide overheads.

43" wide light can be used with overhead 54" to 84" wide overheads.

PRODUCT OPTIONS

Accessory Feature	Width	Country of Installation	Finish
0 No Accessory Feature	20, 23, 30, 33, 40, 43	A Canada / U.S.A.	AC Clear Anodized
1 With Occupancy Sensor			

SAMPLE ORDER CODE

BLYTU 24	20	A	AC
-----------------	-----------	----------	-----------

DIMENSIONS INCHES / MM

W
20 / 508
23 / 584
30 / 762
33 / 838
40 / 1016
43 / 1092

PRICING

NO ACCESSORY FEATURE (0)	WITH OCCUPANCY SENSOR (1)
268	n/a
n/a	340
367	n/a
n/a	437
466	n/a
n/a	535