

This product is mounted above a worksurface in the Square Grommet option or under the worksurface (as specified). It is used to provide quick power, data and USB access at the worksurface level.

WHAT'S INCLUDED

1 power cube with twistable attachment ring or underworksurface bracket and mounting hardware (as specified).

WHAT'S EXCLUDED

Square Grommet Ring (supplied with worksurface when specified) or Square Grommet for field installation.

NOTES

USB-A Output: 5VDC (10 Watts).

Must be installed in Square Cut-Out.

The Square Cut-Out option can be specified on worksurface to allow Power Cube installation.

Data Faceplate **not** included (if specified).

Refer to specification software for Under Worksurface Power Cube location.

When Plug-In option (A) is specified, the 120" or 180" Power Cord Length is available.


When IEC Connector option (I) is specified, only the 72" Power Cord Length is available.

IEC Connector option can only be used in combination with a Navigate Height-Adjustable Base specified with the Frame Integrated Powerbar with IEC Outlet option.

For more information about IEC Connector option (I), refer to One Table One Plug Application Guide in Complements: Teknion's Ergonomics & Accessories Program.

**JNEPC
Power Cube**


One Table
One Plug

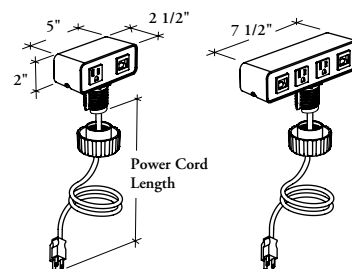

Connector and Cord Type



Plug-In (A)



IEC Connector (I)

PRODUCT OPTIONS

Configuration	Mounting Option	Power Cord Length (Inches)	Connector and Cord Type	Case and Front Finish
D101 Dual – 1 Power / 0 USB / 1 Data	S Square Grommet	072, 120, 180	A Plug-In (Canada/U.S.A.)	Foundation Mica Accent
D120 Dual – 1 Power / 2 USB / 0 Data	U Under Worksurface			
D200 Dual – Power Only				
Q202 Quad – 2 Power/ 0 USB /2 Data				
Q221 Quad – 2 Power/ 2 USB /1 Data				
Q240 Quad – 2 Power /4 USB /0 Data				
Q320 Quad – 3 Power / 2 USB /0 Data				

SAMPLE ORDER CODE

JNEPC D101	S	120	A	52
-------------------	----------	------------	----------	-----------

**DIMENSIONS
INCHES / MM**

L
72 / 1829
120 / 3048
180 / 4572

PRICING

SQUARE GROMMET (S)							
CONFIGURATION							
D101	D120	D200	Q202	Q221	Q240	Q320	
231	288	212	324	382	440	341	
231	288	212	324	382	440	341	
284	341	266	376	435	492	394	

UNDER WORKSURFACE (U)							
CONFIGURATION							
D101	D120	D200	Q202	Q221	Q240	Q320	
297	354	277	389	446	506	407	
297	354	277	389	446	506	407	
349	409	333	441	500	558	460	