

JNEPC Power Cube

This product is mounted above a worksurface in the Square Grommet option or under the worksurface (as specified). It is used to provide quick power, data and USB access at the worksurface level.

WHAT'S INCLUDED

1 power cube with twistable attachment ring or underworksurface bracket and mounting hardware (as specified).

WHAT'S EXCLUDED

Square Grommet Ring (supplied with worksurface when specified) or Square Grommet for field installation.

NOTES

USB-A Output: 5VDC (10 Watts).

Must be installed in Square Cut-Out.

The Square Cut-Out option can be specified on worksurface to allow Power Cube installation.

Data Faceplate **not** included (if specified).

Refer to specification software for Under Worksurface Power Cube location.

When Plug-In option (A) is specified, the 120" or 180" Power Cord Length is available.

When IEC Connector option (I) is specified, only the 72" Power Cord Length is available.

IEC Connector option can only be used in combination with a Navigate Height-Adjustable Base specified with the Frame Integrated Powerbar with IEC Outlet option.

For more information about IEC Connector option (I), refer to One Table One Plug Application Guide in Complements: Teknion's Ergonomics & Accessories Program.

PRODUCT OPTIONS

Configuration	Mounting Option	Power Cord Length (Inches)	Connector and Cord Type	Case and Front Finish
D101 Dual – 1 Power / 0 USB / 1 Data	S Square Grommet	072, 120, 180	A Plug-In (Canada/U.S.A.)	Foundation
D120 Dual – 1 Power / 2 USB / 0 Data	U Under Worksurface		I IEC Connector (Canada/U.S.A.)	Mica
D200 Dual – Power Only				Accent
Q202 Quad – 2 Power/ 0 USB /2 Data				
Q221 Quad – 2 Power/ 2 USB /1 Data				
Q240 Quad – 2 Power /4 USB /0 Data				
Q320 Quad – 3 Power / 2 USB /0 Data				

SAMPLE ORDER CODE

JNEPC D101	S	120	A	52
-------------------	----------	------------	----------	-----------


DIMENSIONS INCHES / MM

L
72 / 1829
120 / 3048
180 / 4572

PRICING

SQUARE GROMMET (S) CONFIGURATION							
D101	D120	D200	Q202	Q221	Q240	Q320	
212	264	194	298	350	404	313	
212	264	194	298	350	404	313	
260	313	244	345	399	452	362	


UNDER WORKSURFACE (U) CONFIGURATION							
D101	D120	D200	Q202	Q221	Q240	Q320	
273	325	255	357	410	464	373	
273	325	255	357	410	464	373	
321	375	305	405	459	512	422	

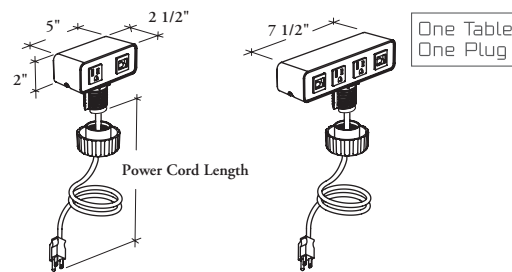

Connector and Cord Type



Plug-In (A)



IEC Connector (I)