

This light is mounted to the underside of an overhead cabinet, solid or metal shelf, or elevated desktop cabinet. It provides task lighting for the worksurface.


**WHAT'S INCLUDED**

1 tangent undercabinet light of specified width, attachment hardware for both metal and wood overhead cabinets (magnets, mounting plates and screws), and 10' cord with detachable power adapter face.

**NOTES**

- Color temperature of 3500K.
- Dimming of ON/OFF, 100%, 60%, 30%.
- Lifespan of 50,000 hours.
- Color Rendering Index (CRI) of 80+.
- Generates 900 Lux.
- UL/c-UL certified.
- Optional PIR Occupancy Sensor with override for on and off.
- Input voltage 100 - 240 V.
- Output voltage 24 V 1A.
- 20" wide light can be used with 24" to 84" wide overheads.
- 23" wide light can be used with 30" to 84" wide overheads.
- 30" and 33" wide lights can be used with 42" to 84" wide overheads.
- 40" wide light can be used with overhead 48" to 84" wide overheads.
- 43" wide light can be used with overhead 54" to 84" wide overheads.

**R L Y T U**  
**Tangent Undercabinet Light**

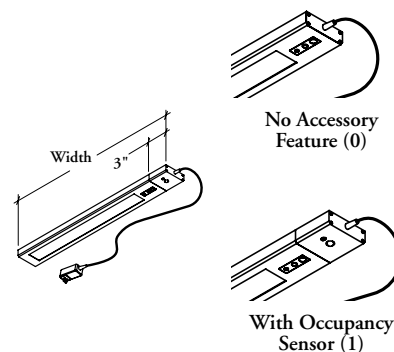

**PRODUCT OPTIONS**

Accessory Feature	Width	Country of Installation	Finish
0 No Accessory Feature	20, 23, 30, 33, 40, 43	A Canada / U.S.A.	AC Clear Anodized
1 With Occupancy Sensor			

**SAMPLE ORDER CODE**

<b>RLYTU 24</b>	<b>20</b>	<b>A</b>	<b>AC</b>
-----------------	-----------	----------	-----------

**DIMENSIONS**  
**INCHES / MM**

W
20 / 508
23 / 584
30 / 762
33 / 838
40 / 1016
43 / 1092

**PRICING**

NO ACCESSORY FEATURE (0)	WITH OCCUPANCY SENSOR (1)
268	n/a
n/a	340
367	n/a
n/a	437
466	n/a
n/a	535