


Xpress

XPFP 

Flush Power Module

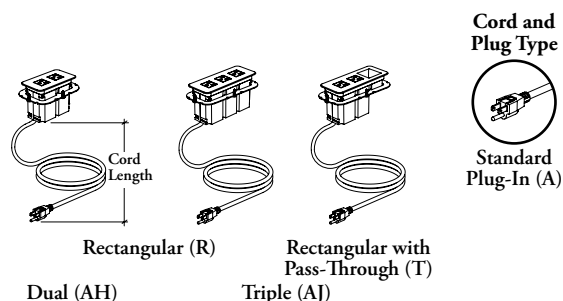

WHAT'S INCLUDED

1 flush power module and mounting hardware.

NOTES

Not available in Chicago.

USB-A Output: 5VDC 2.1A on USB A (12 W).

USB-C Output: 5-12 VDC (18 W).

USB-C Output: 5-20 VDC 3.25A (65 W).

Cord is Grey cloth covered and PVC free.

PRODUCT OPTIONS

Cord and Plug Type	Faceplate Style	Electrical Cutout	Configuration	Cord Length	Country of Installation	Receptacle Finish	Faceplate Finish
A Standard Plug-In	R Rectangular	AH Dual	AJ 1Power / 1USB – A+C (65W)	072, 120, 180	A Canada / U.S.A.	YA Atrium White Coordinate	Foundation
	T Rectangular with Pass-Through	AJ Triple	AM 1Power / 1USB – A+C (18W)			YS Soft Gris Coordinate	Mica
			AS 2Power			YY Ebony Coordinate	Accent
			AZ 2Power / 1USB – A+C (65W)				
			BA 2Power / 1USB – A+C (18W)				
			BJ 3Power				

SAMPLE ORDER CODE

XPFP A	R	AH	AJ	072	A	YY	52
--------	---	----	----	-----	---	----	----

DIMENSIONS
INCHES / MM

Cord Length
72 / 1829
120 / 3048
180 / 4572

PRICING

STANDARD PLUG-IN (A)

RECTANGULAR (R)

DUAL (AH)

2Power (AS)	1Power / 1USB-A+C (18W) (AM)	1Power / 1USB-A+C (65W) (AJ)
175	270	353
196	291	373
219	315	397

TRIPLE (AJ)

3Power (BJ)	2Power / 1USB-A+C (18W) (BA)	2Power / 1USB-A+C (65W) (AZ)
207	284	365
228	305	386
252	329	410

RECTANGULAR WITH PASS-THROUGH (T)

TRIPLE (AJ)

2Power (AS)	1Power / 1USB-A+C (18W) (AM)	1Power / 1USB-A+C (65W) (AJ)
175	270	353
196	291	373
219	315	397