


XWCT  
Connecting Trapeze Worksurface

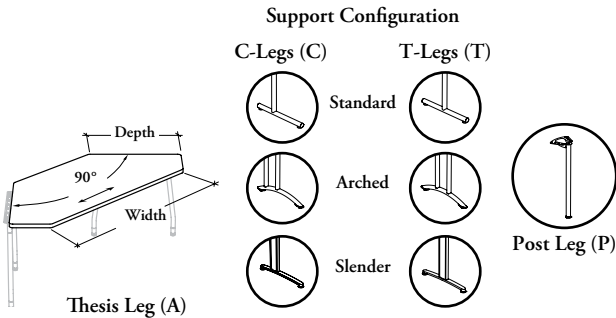

This worksurface is designed for use in linked applications to create 90° application.

**WHAT'S INCLUDED**  
1 worksurface, reinforcing bar (if applicable) and mounting hardware.

**WHAT'S EXCLUDED**  
Supports (XSL\_ / XSPS), Modesty Panel (XCMS / XCMM), Casual Linking Devices (XCLDC), Fixed Linking Plates (XCLPF) and Power Modules or Duo Grommet – Square (XPGQX).

**NOTES**  
This worksurface must be linked to other worksurfaces of the same depth using shared legs. It cannot be used as a standalone worksurface.  
**Not all Thickness, Finish, Style or Color options are available.** Refer to the Application Guide for more details.  
**Not all finishes** are available as Xpress, Please see Xpress catalogue and/or specification software for details.

PRODUCT OPTIONS

Worksurface Thickness	Depth	Width	Angle	Corner Detail	Cut-Out Style	Support Configuration	Worksurface Finish	Edge Trim Style	Edge Trim Finish
D 1" M 1 3/16"	24, 30	36, 42, 48, 54, 60, 66	90	R Radius (Shown)	NN No Cut-Out PC Power/Data Center Cut-Out – Center SC Square Cut-Out – Center (Shown)	A Thesis Leg (Shown) C C-Leg P Post Leg T T-Leg	Source Laminate Foundation Laminate Grade 2 Laminate	6 Straight Trim (3mm) 8 Flat Trim (1.5mm)	Edge Trim Colors

SAMPLE ORDER CODE

XWCT M	24	66	90	R	NN	A	LW	6	ST
--------	----	----	----	---	----	---	----	---	----

DIMENSIONS – INCHES  
FOR MM X BY 25.4

D	W	Angle
24	36	90
24	42	90
24	48	90
24	54	90
24	60	90
24	66	90
30	36	90
30	42	90
30	48	90
30	54	90
30	60	90
30	66	90

PRICING

1" (D)	1 3/16" (M)
Source Laminate	Foundation Laminate      Grade 2 Laminate
294	383      455
319	445      529
435	510      606
461	575      683
486	636      756
577	701      833
340	479      569
370	558      663
495	636      756
525	715      850
555	797      947
648	879      1044