

CTCK

Cockpit Worksurface

This worksurface is ideal for classroom applications where desks are aligned in rows and installed on shared legs.

WHAT'S INCLUDED

1 worksurface, reinforcing bar (for widths above 54"), Grommet (CTGM) or Power/Data Center (CLMC) if specified.

WHAT'S EXCLUDED


Worksurface Supports.

NOTES

Grommet styles B, D, E, F and H are not available on worksurfaces less than 48" wide.

Grommet finishes are applicable to B, C, D and E grommet styles only.

Power/Data Center finishes are applicable to F, G and H grommet styles only.

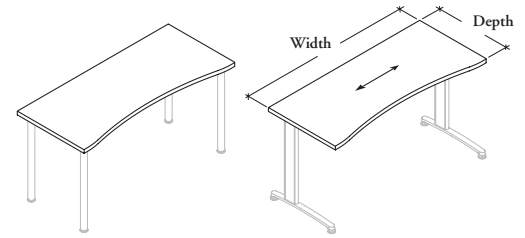

Post Legs (P)

C-Legs/T-Legs/Int. Legs (B)

PRODUCT OPTIONS

Grommet Style/ Location	Depth	Width	Support Configu- ration	Worksurface Finish	Edge Trim Style	Corner Detail (If applicable)	Edge Trim Finish (If applicable)	Grommet Finish (If applicable)	Power/Data Center Finish (If applicable)
A No Grommet/No Power/ Data Center	24, 30	36, 42, 48, 54, 60, 66, 72, 78, 84	B Base (C-Leg, T-Leg, Int. Leg) P Post Leg	Foundation Laminate Flintwood	6 Straight Trim 7 Flintwood Straight Trim	S Standard R Radius (Straight Trim only)	Edge Trim Colors	Source Laminate Foundation Mica	B Soft Gris E Ebony
B Left Grommet									
C Centered Grommet									
D Right Grommet									
E Left & Right Grommet									
F Left Power/Data Center									
G Centered Power/Data Center									
H Right Power/Data Center									

SAMPLE ORDER CODE

CTCK C	30	48	B	2D	6	R	4D	P	
---------------	-----------	-----------	----------	-----------	----------	----------	-----------	----------	--

**DIMENSIONS
INCHES / MM**

D	W
24 / 610	36 / 914
24 / 610	42 / 1067
24 / 610	48 / 1219
24 / 610	54 / 1372
24 / 610	60 / 1524
24 / 610	66 / 1676
24 / 610	72 / 1829
24 / 610	78 / 1981
24 / 610	84 / 2134
30 / 762	36 / 914
30 / 762	42 / 1067
30 / 762	48 / 1219
30 / 762	54 / 1372
30 / 762	60 / 1524
30 / 762	66 / 1676
30 / 762	72 / 1829
30 / 762	78 / 1981
30 / 762	84 / 2134

PRICING

FOUNDATION LAMINATE		FLINTWOOD	
Straight Trim		Flintwood Straight Trim	
	312		669
	357		767
	403		869
	452		971
	497		1069
	544		1171
	592		1273
	638		1370
	684		1470
	349		749
	409		878
	465		1003
	523		1127
	583		1252
	642		1379
	697		1500
	756		1629
	817		1757

If grommet is specified (B, C, D, E), add 63.

If one power/data center is specified (F, G, H), add 168.