


Xpress

CTTA

Trapeze Angular Worksurface

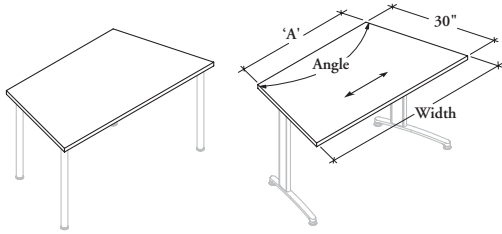

Post Legs (P)

C-Legs/T-Legs/Int. Legs (B)

This worksurface may be used for meeting, training or conferencing applications.

WHAT'S INCLUDED

1 worksurface, reinforcing bar (for widths above 54"), Grommet (CTGM) or Power/Data Center (CLMC) if specified.

WHAT'S EXCLUDED

Worksurface Supports.

NOTES

Grommet styles B, D, E, F and H are not available on worksurfaces less than 72" wide.

Grommet finishes are applicable to B, C, D and E grommet styles only.

Power/Data Center finishes are applicable to F, G and H grommet styles only.

PRODUCT OPTIONS

Grommet Style/ Location	Angle	Depth	Width	Support Configu- ration	Worksurface Finish	Edge Trim Style	Corner Detail (Straight Trim only)	Edge Trim Finish (If applicable)	Grommet Finish (If applicable)	Power/Data Center Finish (If applicable)
A No Grommet/No Power/ Data Center	20 20°	30	36, 42, 48, 54, 60, 66, 72, 78, 84	B Base (C-Leg, T-Leg, Int. Leg)	Foundation Laminate	6 Straight Trim	R Radius	Edge Trim Colors	Source Laminate	B Soft Gris E Ebony
B Left Grommet	30 30°				Flintwood				Foundation	
C Centered Grommet	50 50°								Mica	
D Right Grommet	60 60°			P Post Leg		7 Flintwood Straight Trim				
E Left & Right Grommet										
F Left Power/Data Center										
G Centered Power/Data Center										
H Right Power/Data Center										

SAMPLE ORDER CODE

CTTA C	60	30	60	B	2D	6	R	4D	P	
---------------	-----------	-----------	-----------	----------	-----------	----------	----------	-----------	----------	--

DIMENSIONS INCHES / MM

D	W
30 / 762	36 / 914
30 / 762	42 / 1067
30 / 762	48 / 1219
30 / 762	54 / 1372
30 / 762	60 / 1524
30 / 762	66 / 1676
30 / 762	72 / 1829
30 / 762	78 / 1981
30 / 762	84 / 2134

PRICING

FOUNDATION LAMINATE	FLINTWOOD
20° ANGLE (20)	
303	651
353	760
403	869
455	976
504	1083
557	1195
608	1305
656	1412
708	1523

OTHER DIMENSIONS

'A'
26 / 660
32 / 813
38 / 965
44 / 1118
50 / 1270
60 / 1524
66 / 1676
72 / 1829
78 / 1981

If grommet is specified (B, C, D, E), add 63.

If one power/data center is specified (F, G, H), add 168.

Pricing is continued on the following page.

CTTA

Trapeze Angular Worksurface
(Continued)DIMENSIONS
INCHES / MM

D	W
30 / 762	36 / 914
30 / 762	42 / 1067
30 / 762	48 / 1219
30 / 762	54 / 1372
30 / 762	60 / 1524
30 / 762	66 / 1676
30 / 762	72 / 1829
30 / 762	78 / 1981
30 / 762	84 / 2134
30 / 762	48 / 1219
30 / 762	54 / 1372
30 / 762	60 / 1524
30 / 762	66 / 1676
30 / 762	72 / 1829
30 / 762	78 / 1981
30 / 762	84 / 2134
30 / 762	60 / 1524
30 / 762	66 / 1676
30 / 762	72 / 1829
30 / 762	78 / 1981
30 / 762	84 / 2134

PRICING

FOUNDATION LAMINATE	FLINTWOOD
30° ANGLE (30)	
303	651
353	760
403	869
455	976
504	1083
557	1195
608	1305
656	1412
708	1523
50° ANGLE (50)	
403	869
455	976
504	1083
557	1195
608	1305
656	1412
708	1523
60° ANGLE (60)	
504	1083
557	1195
608	1305
656	1412
708	1523

OTHER DIMENSIONS

'A'	
21 / 533	
27 / 686	
33 / 838	
39 / 991	
45 / 1143	
51 / 1295	
57 / 1448	
63 / 1600	
69 / 1753	
24 / 610	
30 / 762	
36 / 914	
42 / 1067	
48 / 1219	
54 / 1372	
60 / 1524	
31 / 787	
36 / 914	
44 / 1118	
49 / 1245	
56 / 1422	

If grommet is specified (B, C, D, E), add 63.

If one power/data center is specified (F, G, H), add 168.